
Using a unique steering and correction mechanism allows the driving direction to easily remain parallel to the form;
Reasonable driving from the main design makes operation convenient, comfortable, easy, and smooth.

VIBRATION BEAM

BODY LENGTH:0.5 METERS, 1 METER, 2 METERS PER SECTIONCAN BE FREELY COMBINED ACCORDING TO NEEDS
FRAME HEIGHT:IRON: 34/38 ALUMINUM: 50-60CM
OPTIONAL POWER:173 ELECTRIC 4KW/7KW
MODEL:6HP 9HP 13HP
PULPING DEPTH:26CM
FRAME THICKNESS:5MM
ADJUSTABLE ARCH:5-10DEGREE
MODE OF WALKING:HAND-CRANK
WALKING GASOLINE 170/190 DIESEL

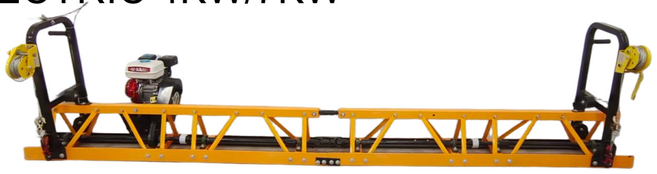

VIBRATION BEAM

BODY LENGTH:0.5 METERS, 1 METER, 2 METERS PER SECTIONCAN BE FREELY COMBINED ACCORDING TO NEEDS
FRAME HEIGHT:IRON: 34/38 ALUMINUM: 50-60CM
OPTIONAL POWER:173 ELECTRIC 4KW/7KW
MODEL:6HP 9HP 13HP
PULPING DEPTH:26CM
FRAME THICKNESS:5MM
ADJUSTABLE ARCH:5-10DEGREE
MODE OF WALKING:HAND-CRANK
WALKING GASOLINE 170/190 DIESEL



VIBRATION BEAM

PRODUCT NAME :SMALL ARCHING SUPER LEVELING RULER
ROD LENGTH:4-612 (CUSTOMIZABLE)
OPTIONAL POWER:GASOLINE ENGINE / DIESEL ENGINE
PAVING SPEED:30-60
RULER MATERIAL:DOUBLE-LAYER ALUMINUM

